

■ Productor Character

- Half Bridge Rectified、Common Cathode Structure.
- Multilayer Metal -Silicon Potential Structure.
- Beautiful High Temperature Character.
- Have Over Voltage protect loop, high reliability.
- RoHs Product.

■Primary Use

- Low Voltage High Frequency Switching Power Supply.
- Low Voltage High Frequency Invers Circuit.
- Low Voltage Continued Circuit and Protection Circuit.

■Summarize

SR1045CS Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications


Absolute Maximum Ratings

Item	Symbol	Data	Unit
Maximal Inverted Repetitive Peak Voltage	VRRM	45	V
*Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	IFAV	10	A
Typical Thermal Resistance (per leg) Package = TO-252	R θ Jc	2	°C/W
		4	°C/W
Forward Peak Surge Current(Rated Load 8.3 Half Mssine Wave-According to JEDEC Method)	IFSM	120	A
Maximum Rate of Voltage Change (at Rated VR)	dv/dt	10000	V/uS
Peak Repetitive Reverse Surge Current (2uS-1Khz)	IRRM	1	A
Operating Junction Temperature	TJ	-40- +175	°C
Storage Temperature	TSTG	-40- +175	°C


Electricity Character

Item	Test Condition		TPY.	MAX.	Unit
IR	TJ =25°C	VR=VRRM		10	uA
	TJ =125°C			1	mA
VF	TJ =25°C	IF=5A		0.55	V
	TJ =125°C	IF=5A	0.41	0.47	V


The forward voltage and forward current curve.

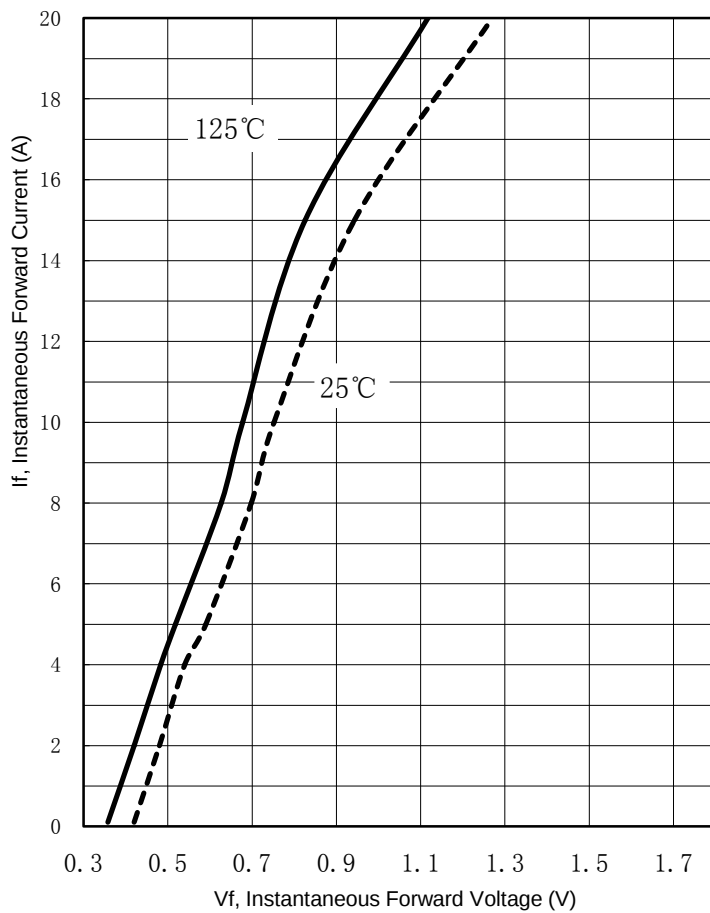


Current Derating Curve, Per Element

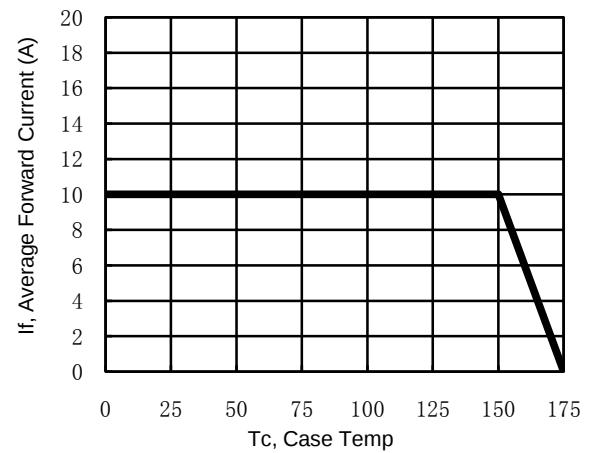

The crunode capacitance curve

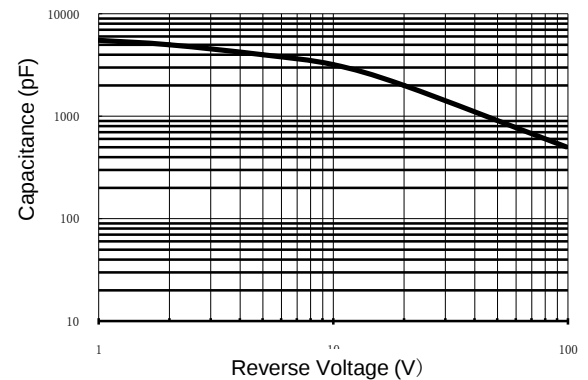


The reverse leak current and the reverse voltage (single-device) curve.

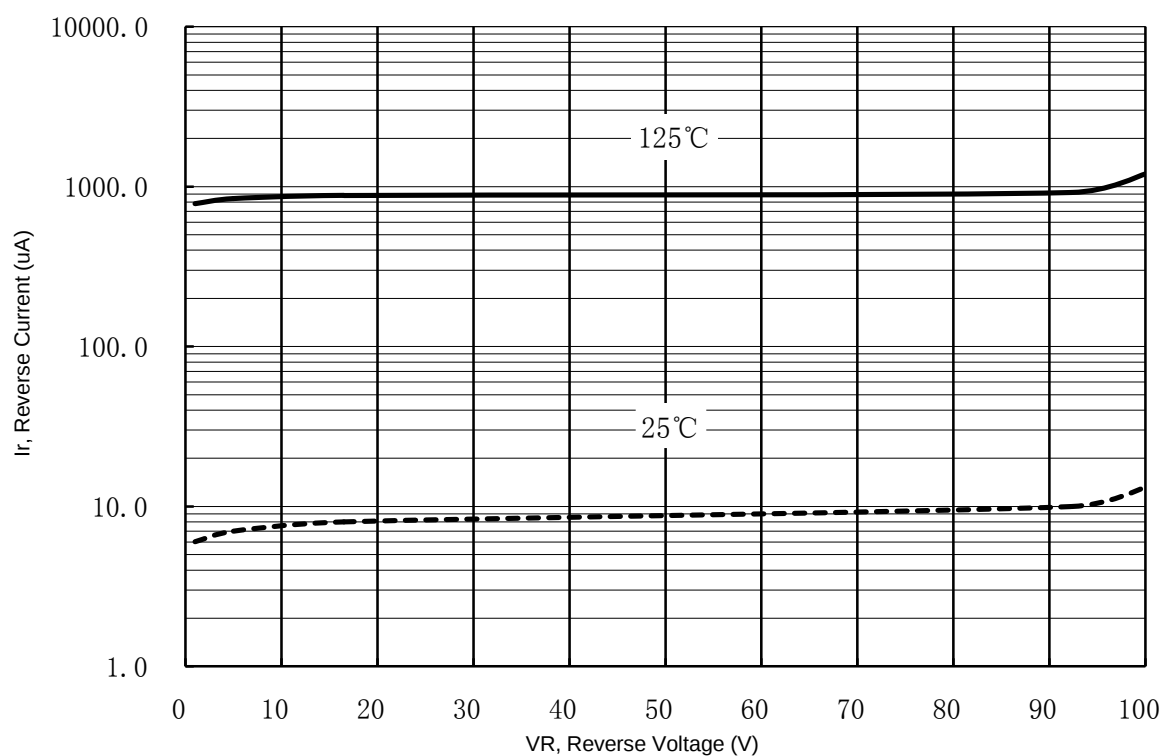

Package Outline Dimensions millimeters

TO-252

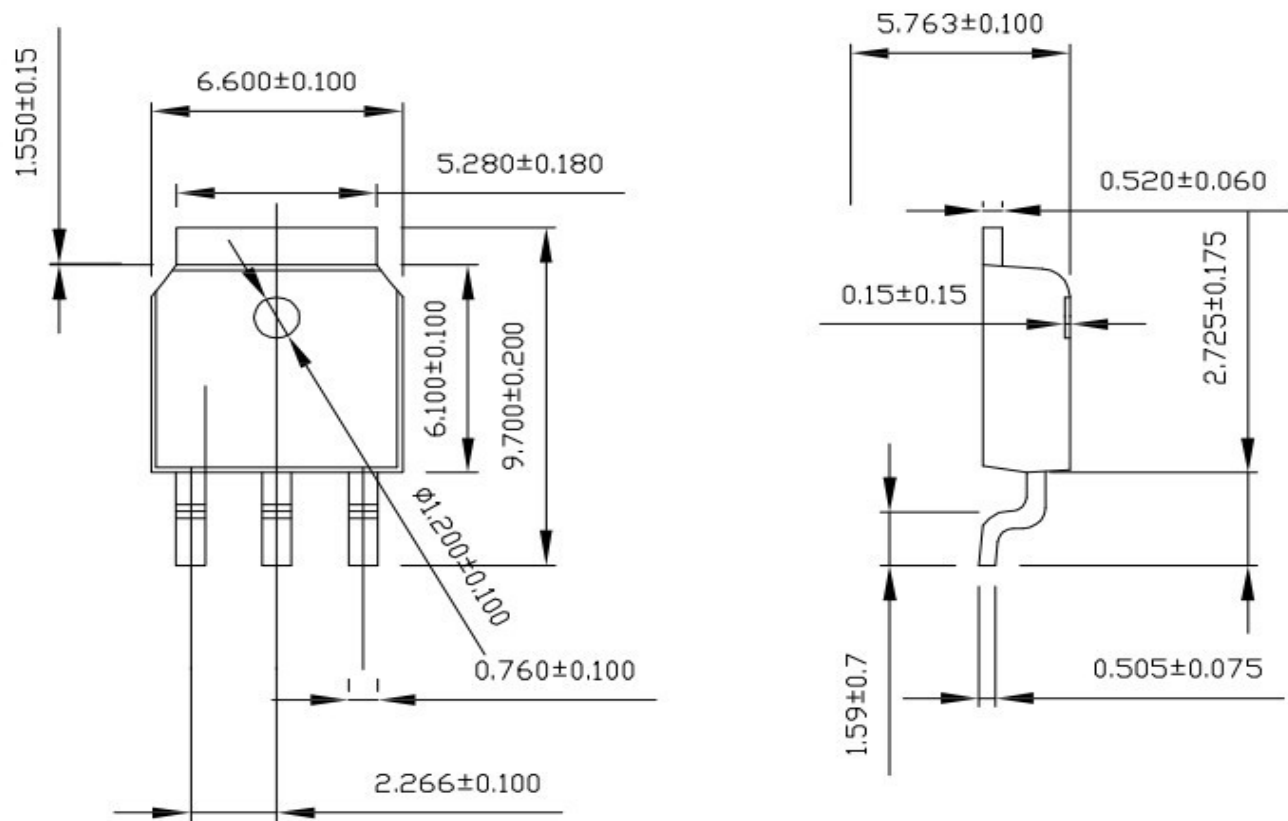

Ordering information

Part Number	Package	Delivery mode
SR1045CS	TO-252	80 pieces / tube

MHCHXM

SR1045CS

XXXX

- 1.XXXX代表日期码，第一码表示公元年的最后一码，第二码表示生产时当月码（A,B,C .为一月，二月，三月 ），第三，四码表示大量生产时批次码。
例如:2009年第一月生产的，D/C为9AXX。
- 2.包装及出货:ROHS,80PCS/管,4K/BOX,20K(20K BOXEX)/CARTON。

注意事项

- 1) 凡本公司出厂的产品，均符合相应规格书的电参数和外形尺寸要求；对于客户有特殊要求的产品 双方应签订相关技术协议。
- 2) 在安装时，要注意减少机械应力的产生，防止由此引起的产品失效；避免靠近发热元件；焊接上锡时要注意控制温度和时间。